


BV10NPA-2366E-PN10/PN16 - Levier en aluminium

Vanne à papillon type Wafer, montage entre brides PN10/PN16, à levier en aluminium
Norme d'écartement: EN 558-1 Tableau 1 série 20



N° d'article	Réf. Belven
10HCD216E1A0050	BV10NPA-2366E-PN16-DN050 - ALU LEVER
10HCD216E1A0065	BV10NPA-2366E-PN16-DN065 - ALU LEVER
10HCD216E1A0080	BV10NPA-2366E-PN16-DN080 - ALU LEVER
10HCD216E1A0100	BV10NPA-2366E-PN16-DN100 - ALU LEVER
10HCD216E1A0125	BV10NPA-2366E-PN16-DN125 - ALU LEVER
10HCD216E1A0150	BV10NPA-2366E-PN16-DN150 - ALU LEVER

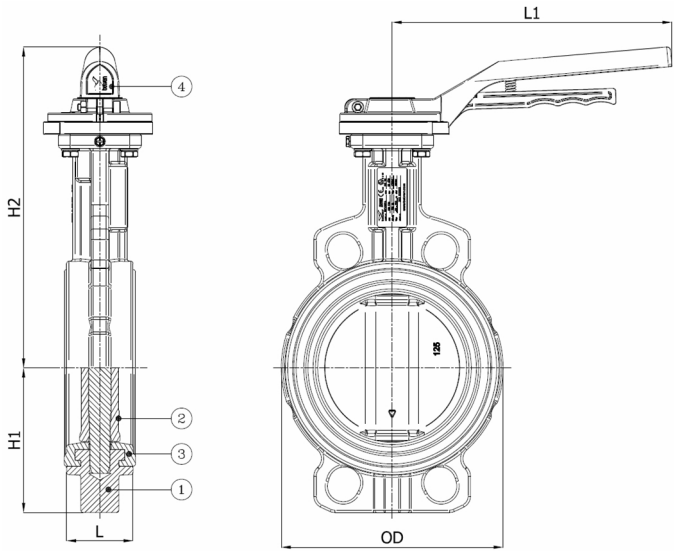

DN/Pouce	L	H1	H2	OD	L1	Cl. press.	Poids(kg)
DN050 (2")	43	65	218	96	210	PN16	3,40
DN065 (2 1/2")	46	71	230	110	210	PN16	4,20
DN080 (3")	46	77	237	124	210	PN16	4,40
DN100 (4")	52	107	256	148	210	PN16	5,70
DN125 (5")	56	122	272	180	210	PN16	7,70
DN150 (6")	56	150	285	206	210	PN16	8,60

Item 1	Item 2	Item 3	Item 4
Matériau Corps	Matériau Siège	Matériau Clapet	Matériau Commande
Fonte : GG25 + revêtement epoxy	EPDM	Acier inoxydable : CF8M	Aluminium