


## BV10NPA-2366V-PN10/PN16 - Arbre Libre

Vanne à papillon type Wafer, montage entre brides PN10/PN16, arbre libre

Norme d'écartement: EN 558-1 Tableau 1 série 20



N° d'article	Réf. Belven
10HCD116V00050	BV10NPA-2366V-PN10-DN050 - BARE SHAFT
10HCD116V00065	BV10NPA-2366V-PN10-DN065 - BARE SHAFT
10HCD116V00080	BV10NPA-2366V-PN10-DN080 - BARE SHAFT
10HCD116V00100	BV10NPA-2366V-PN10-DN100 - BARE SHAFT
10HCD116V00125	BV10NPA-2366V-PN10-DN125 - BARE SHAFT
10HCD116V00150	BV10NPA-2366V-PN10-DN150 - BARE SHAFT

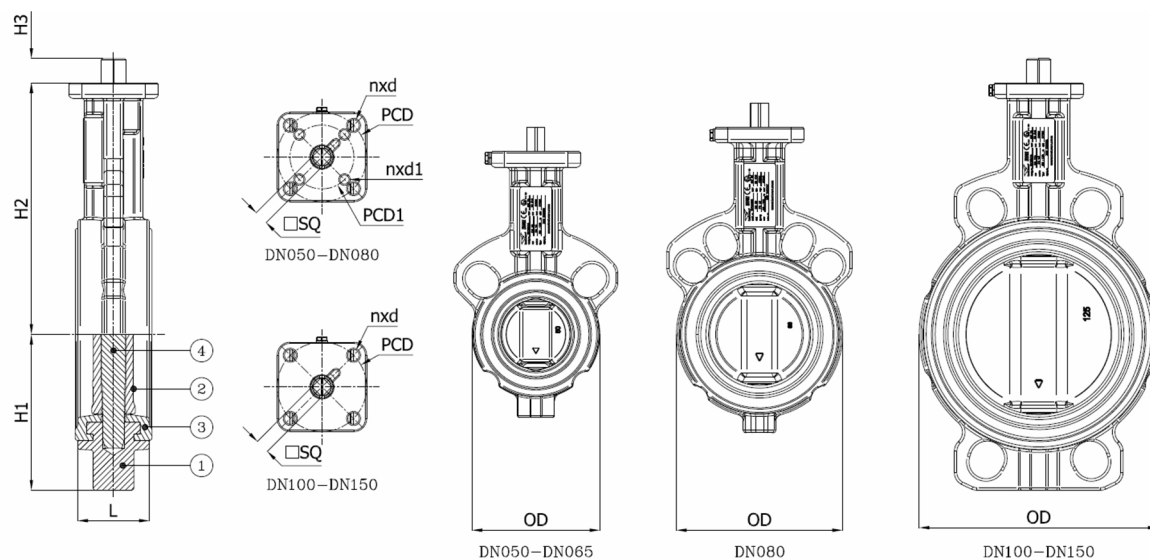

DN/Pouce	L	H1	H2	H3	OD	SQ	ISO	PCD	n x d1	PCD1	n x d	ISO1	Cl. press.	Poids(kg)
DN050 (2")	43	65	143	19	96	11	F05	50	4 x d10	70	4 x d7	F07	PN10	3,00
DN065 (2 1/2")	46	71	155	19	110	11	F05	50	4 x d10	70	4 x d7	F07	PN10	3,80
DN080 (3")	46	77	162	19	124	11	F05	50	4 x d10	70	4 x d7	F07	PN10	4,00
DN100 (4")	52	107	181	19	148	11	F07	70			4 x d10		PN10	5,30
DN125 (5")	56	122	197	19	180	14	F07	70			4 x d10		PN10	7,30
DN150 (6")	56	150	210	19	206	14	F07	70			4 x d10		PN10	8,20

Item 1	Item 2	Item 3	Item 4
Matériau Corps	Matériau Siège	Matériau Clapet	Matériau Commande
Fonte : GG25 + revêtement epoxy	VITON	Acier inoxydable : CF8M	Tige en inox A182 F6A