

Technical Product Sheet


BV12NPA-2466E-PN10/PN16 - Aluminium Lever

Lug type butterfly valve, mounting between flanges PN10/PN16, with aluminium lever

Face to Face Standard: EN 558-1 Table 1 series 20



Item Number	Belven Ref.
12HCD226E1A0050	BV12NPA-2466E-PN16-DN050 - ALU LEVER
12HCD226E1A0065	BV12NPA-2466E-PN16-DN065 - ALU LEVER
12HCD226E1A0080	BV12NPA-2466E-PN16-DN080 - ALU LEVER
12HCD226E1A0100	BV12NPA-2466E-PN16-DN100 - ALU LEVER
12HCD226E1A0125	BV12NPA-2466E-PN16-DN125 - ALU LEVER
12HCD226E1A0150	BV12NPA-2466E-PN16-DN150 - ALU LEVER

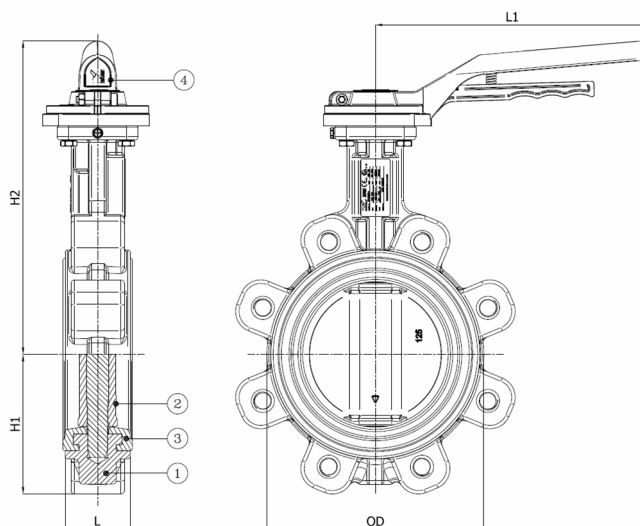

DN/Size	L	H1	H2	OD	L1	Press.Cl.	Weight(kg)
DN050 (2")	43	65	218	96	210	PN16	3.80
DN065 (2 1/2")	46	71	230	110	210	PN16	4.40
DN080 (3")	46	77	237	124	210	PN16	4.90
DN100 (4")	52	107	256	148	210	PN16	8.00
DN125 (5")	56	122	272	180	210	PN16	9.90
DN150 (6")	56	150	285	206	210	PN16	10.80

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Ductile iron : GGG40 + Epoxy coating	EPDM	Stainless steel : CF8M	Aluminium

Belven N.V.

Blokhuisstraat 24 | 2800 Mechelen | Belgium

Tel. 015 29 40 70 | Fax. 015 20 14 13 | info@belven.com | www.belven.com

We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.