Technical Product Sheet


BV10NPA-2466E-PN10/PN16 - Electric 110/240V AC

Wafer type butterfly valve, mounting beween flanges PN10/PN16, with electric actuator
Face to Face Standard: EN 558-1 Table 1 series 20

The actuator is selected for 20°C water with a pressure drop of 6 bar and minimum 1 cycle per week - 110/240V AC



Item Number	Belven Ref.
10HCD226EXVV0200	BV10NPA-2466E-PN16-DN200 - VB110 110/240VAC
10HCD226EXVV0250	BV10NPA-2466E-PN16-DN250 - VB270 110/240VAC
10HCD226EXVV0300	BV10NPA-2466E-PN16-DN300 - VB270 110/240VAC

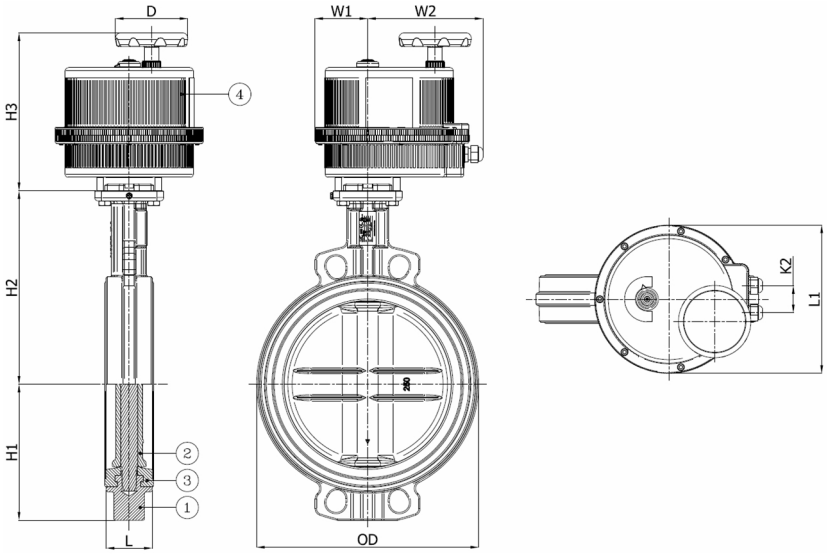

DN/Size	L	H1	H2	H3	OD	L1	W2	W1	D	K2	Press.Cl.	Weight(kg)
DN200 (8")	60	165	240	237,1	259	211	153	84	110	40	PN16	18.60
DN250 (10")	68	201	286	233,5	320	222	170	77	110	40	PN16	27.20
DN300 (12")	78	234	309	233,5	370	222	170	77	110	40	PN16	38.50

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Ductile iron : GGG40 + Epoxy coating	EPDM	Stainless steel : CF8M	Self-extinguishing polymer

Belven N.V.
Blokhuisstraat 24 | 2800 Mechelen | Belgium
Tel. 015 29 40 70 | Fax. 015 20 14 13 | info@belven.com | www.belven.com
We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.