

Technical Product Sheet


BV2-340T-BSP (M/F)

Brass 2-way ball valve, full bore, threaded M/F ISO228/1-G, with lever

Face to Face Standard: Factory standard



| Item Number | Belven Ref. |
|-------------|------------------------------------|
| 023111T1008 | BV2-340T-BSP(M/F) - 1/4" - LEVER |
| 023111T1010 | BV2-340T-BSP(M/F) - 3/8" - LEVER |
| 023111T1015 | BV2-340T-BSP(M/F) - 1/2" - LEVER |
| 023111T1020 | BV2-340T-BSP(M/F) - 3/4" - LEVER |
| 023111T1025 | BV2-340T-BSP(M/F) - 1" - LEVER |
| 023111T1032 | BV2-340T-BSP(M/F) - 1 1/4" - LEVER |
| 023111T1040 | BV2-340T-BSP(M/F) - 1 1/2" - LEVER |
| 023111T1050 | BV2-340T-BSP(M/F) - 2" - LEVER |

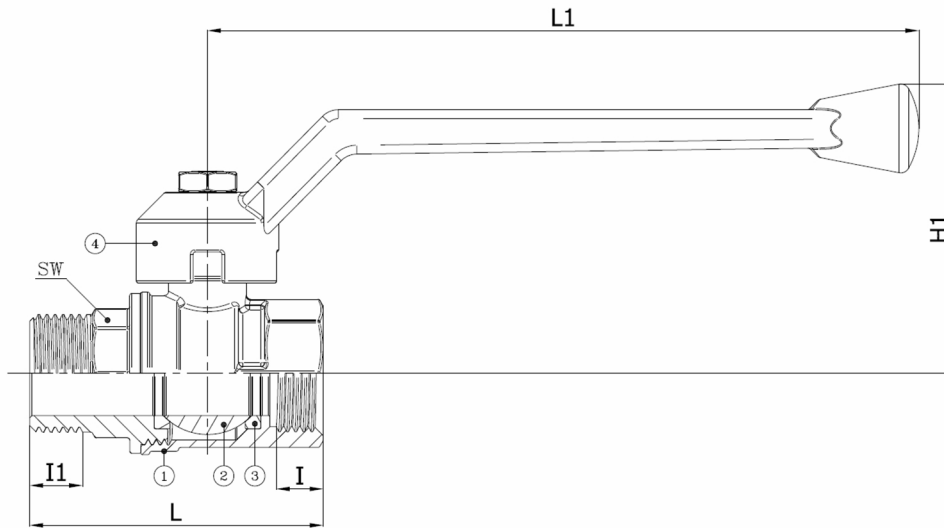

| DN/Size | L | H1 | I | I1 | L1 | SW | Press.Cl. | Weight(kg) |
|----------------|-------|------|------|------|-----|----|-----------|------------|
| DN008 (1/4") | 59 | 47,5 | 11 | 11 | 95 | 20 | PN64 | 0.14 |
| DN010 (3/8") | 59,5 | 47,5 | 11,4 | 11,4 | 95 | 20 | PN64 | 0.14 |
| DN015 (1/2") | 59 | 47,5 | 12 | 13 | 95 | 25 | PN50 | 0.18 |
| DN020 (3/4") | 66,5 | 59,5 | 12 | 13 | 110 | 31 | PN40 | 0.28 |
| DN025 (1") | 77,7 | 62 | 14,5 | 15 | 110 | 38 | PN40 | 0.42 |
| DN032 (1 1/4") | 91,2 | 75,5 | 16 | 17 | 160 | 48 | PN40 | 0.75 |
| DN040 (1 1/2") | 104,7 | 81,5 | 18 | 18 | 160 | 54 | PN40 | 1.07 |
| DN050 (2") | 121 | 99,5 | 19 | 22 | 170 | 67 | PN40 | 1.71 |

| Item 1 | Item 2 | Item 3 | Item 4 |
|-----------------------------|-----------------------------|---------------|-----------------------------|
| Body Material | Ball Material | Seat Material | Actuator Material |
| Brass : CW617N UNI EN 12420 | Brass : CW617N UNI EN 12420 | PTFE | Aluminium alloy EN AC-46100 |

Belven N.V.

Blokhuisstraat 24 | 2800 Mechelen | Belgium

Tel. 015 29 40 70 | Fax. 015 20 14 13 | info@belven.com | www.belven.com

We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.