

Technical Product Sheet


BV12NPA-2466E-PN10/PN16 - Bare Shaft

Lug type butterfly valve, mounting between flanges PN10/PN16, bare shaft

Face to Face Standard: EN 558-1 Table 1 series 20



Item Number	Belven Ref.
12HCD226E00050	BV12NPA-2466E-PN16-DN050 - BARE SHAFT
12HCD226E00065	BV12NPA-2466E-PN16-DN065 - BARE SHAFT
12HCD226E00080	BV12NPA-2466E-PN16-DN080 - BARE SHAFT
12HCD226E00100	BV12NPA-2466E-PN16-DN100 - BARE SHAFT
12HCD226E00125	BV12NPA-2466E-PN16-DN125 - BARE SHAFT
12HCD226E00150	BV12NPA-2466E-PN16-DN150 - BARE SHAFT

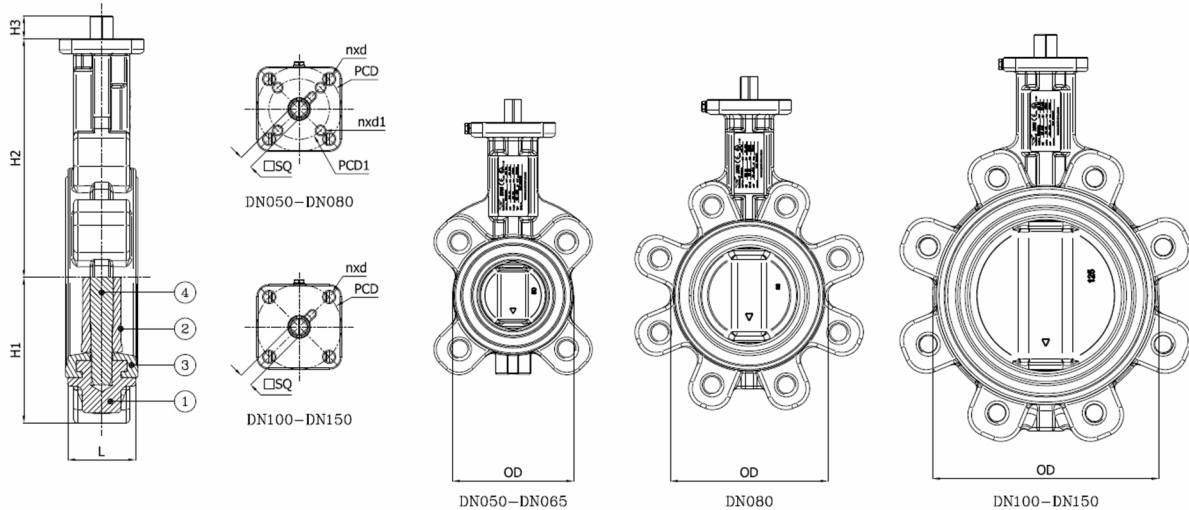

DN/Size	L	H1	H2	H3	OD	SQ	ISO	PCD	n x d1	PCD1	n x d	ISO1	Press.Cl.	Weight(kg)
DN050 (2")	43	65	143	19	96	11	F05	50	4 x d10	70	4 x d7	F07	PN16	3.40
DN065 (2 1/2")	46	71	155	19	110	11	F05	50	4 x d10	70	4 x d7	F07	PN16	4.00
DN080 (3")	46	77	162	19	124	11	F05	50	4 x d10	70	4 x d7	F07	PN16	4.50
DN100 (4")	52	107	181	19	148	11	F07	70			4 x d10		PN16	7.60
DN125 (5")	56	122	197	19	180	14	F07	70			4 x d10		PN16	9.50
DN150 (6")	56	150	210	19	206	14	F07	70			4 x d10		PN16	10.40

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Ductile iron : GGG40 + Epoxy coating	EPDM	Stainless steel : CF8M	SS Stem A182 F6A

Belven N.V.

Blokhuisstraat 24 | 2800 Mechelen | Belgium
 Tel. 015 29 40 70 | Fax. 015 20 14 13 | info@belven.com | www.belven.com

We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.