


BV2-340T-BSP + VERHOOGDE T-HENDEL

Messing 2-weg kogelkraan, volle doorlaat, draadeinden V/V ISO 228/1-G, met hoge vlinderhendel
Norm Bouwlengte: Fabrieksstandaard



Artikelnummer	Belven Ref.
024111T4015	BV2-340T-FF/BSP 1/2" + T-LEVER RED/BLUE
024111T4020	BV2-340T-FF/BSP 3/4" + T-LEVER RED/BLUE
024111T4025	BV2-340T-FF/BSP 1" + T-LEVER RED/BLUE
024111T4032	BV2-340T-FF/BSP 1 1/4" + T-LEVER RED/BLUE
024111T4040	BV2-340T-FF/BSP 1 1/2" + T-LEVER RED/BLUE
024111T4050	BV2-340T-FF/BSP 2" + T-LEVER RED/BLUE

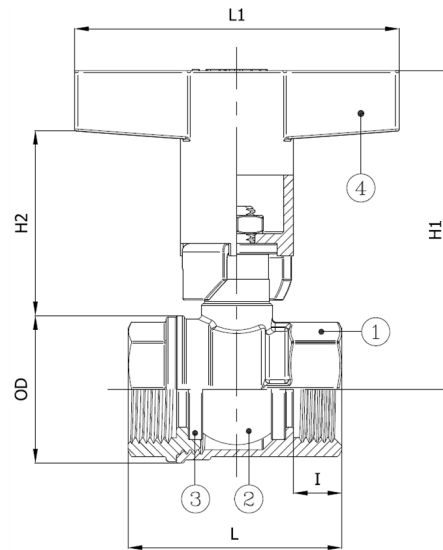

DN/Inch	L	H1	H2	I	L1	OD	Kvs	SW	Drukkl.	Gewicht(kg)
DN015 (1/2")	47,5	71	41,5	12	80	30	16,3	25	PN50	0,16
DN020 (3/4")	53	77,5	44,5	12	80	36	29,5	31	PN40	0,26
DN025 (1")	65,5	80	43,3	14,5	80	43,5	43	38	PN40	0,37
DN032 (1 1/4")	76,5	110,3	63,7	16	120	53	89	48	PN40	0,66
DN040 (1 1/2")	89	116,2	63,6	18	120	65	230	54	PN40	0,94
DN050 (2")	103	126	66	19	120	80	265	67	PN40	1,57

Item 1	Item 2	Item 3	Item 4
Materiaal Huis	Materiaal Kogel	Materiaal Zitting	Materiaal Bediening
Messing : CW617N UNI EN 12420	Messing : < 1 1/4" CW617N / >1" CW612N	PTFE	PA 6.6