


BV3-2466T-BW - Hendel

3-delige kogelkraan, volle doorlaat, BW laseinden, ISO 5211 opbouwflens, met hendel
Norm Bouwlengte: Fabrieksstandaard



Artikelnummer	Belven Ref.
036857T1010	BV3-2466T-BW - 3/8" - LEVER
036857T1015	BV3-2466T-BW - 1/2" - LEVER
036857T1020	BV3-2466T-BW - 3/4" - LEVER
036857T1025	BV3-2466T-BW - 1" - LEVER
036857T1032	BV3-2466T-BW - 1 1/4" - LEVER
036857T1040	BV3-2466T-BW - 1 1/2" - LEVER
036857T1050	BV3-2466T-BW - 2" - LEVER
036857T1065	BV3-2466T-BW - 2 1/2" - LEVER
036857T1080	BV3-2466T-BW - 3" - LEVER
036857T1100	BV3-2466T-BW - 4" - LEVER

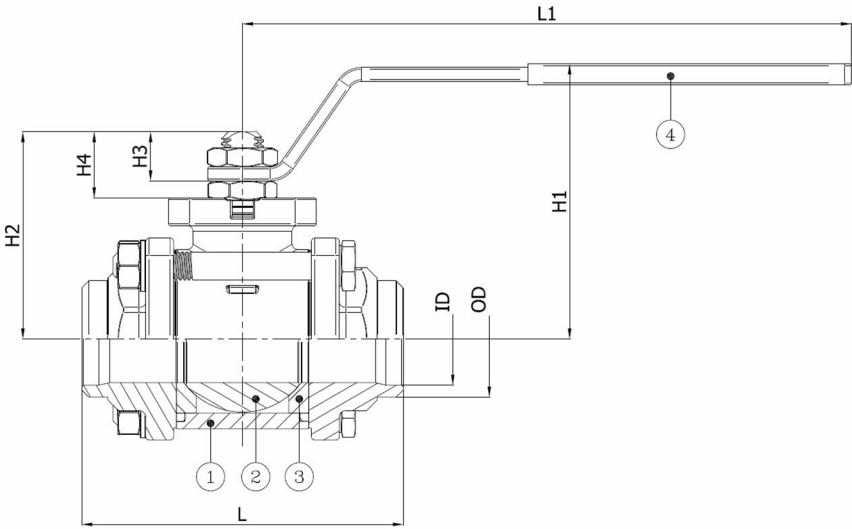

DN/Inch	L	H1	H2	H3	H4	L1	ID	OD	E	F	ISO	PCD	n x d	Drukkl.	Gewicht(kg)
DN010 (3/8")	57	50	35	9	13,5	110	12,48	17,1	8	5				PN64	0,30
DN015 (1/2")	65	64	47	10	15	131	15,76	21,3	10	7	F03	36	4 x 6	PN64	0,50
DN020 (3/4")	76	68	52	10	16	131	20,96	26,7	10	7	F04	42	4 x 5,5	PN40	0,70
DN025 (1")	92	79	60	12,5	19,5	174	26,64	33,4	12	8	F04	42	4 x 6	PN40	1,20
DN032 (1 1/4")	106	83	64	12,5	19,5	174	35,08	42,2	12	8	F04	42	4 x 5,5	PN25	1,70
DN040 (1 1/2")	116	100	79	16,5	24	250	40,94	48,3	16	10	F05	50	4 x 6,5	PN25	2,50
DN050 (2")	136	107	86	16,5	24	250	52,48	60,3	16	10	F05	50	4 x 6,5	PN25	3,90
DN065 (2 1/2")	153	126	103	18	28	321	62,58	73	20	14	F07	70	4 x M8	PN16	8,15
DN080 (3")	180	137	114	18	28	321	77,92	88,9	20	14	F07	70	4 x M8	PN16	12,80
DN100 (4")	217	156	137	22	34,5	381	102,26	114,3	24	18	F10	102	4 x M10	PN16	21,50

Item 1	Item 2	Item 3	Item 4
Materiaal Huis	Materiaal Kogel	Materiaal Zitting	Materiaal Bediening
Koolstofstaal : A216 WCB	Roestvrijstaal : A351 CF8/A182-F304	PTFE	Koolstofstaal