


# Technical Product Sheet

## BV2-340T-BSP + HIGH T-LEVER

Brass 2-way ball valve, full bore, threaded F/F ISO228/1-G, with high T-lever  
Face to Face Standard: Factory standard



Item Number	Belven Ref.
024111T4015	BV2-340T-FF/BSP 1/2" + T-LEVER RED/BLUE
024111T4020	BV2-340T-FF/BSP 3/4" + T-LEVER RED/BLUE
024111T4025	BV2-340T-FF/BSP 1" + T-LEVER RED/BLUE
024111T4032	BV2-340T-FF/BSP 1 1/4" + T-LEVER RED/BLUE
024111T4040	BV2-340T-FF/BSP 1 1/2" + T-LEVER RED/BLUE
024111T4050	BV2-340T-FF/BSP 2" + T-LEVER RED/BLUE

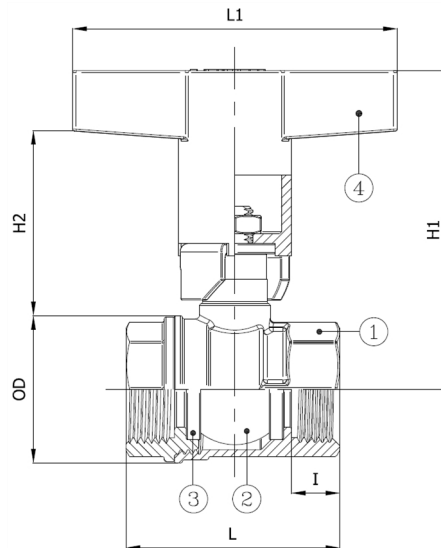

DN/Size	L	H1	H2	I	L1	OD	Kvs	SW	Press.Cl.	Weight(kg)
DN015 (1/2")	47,5	71	41,5	12	80	30	16,3	25	PN50	0.16
DN020 (3/4")	53	77,5	44,5	12	80	36	29,5	31	PN40	0.26
DN025 (1")	65,5	80	43,3	14,5	80	43,5	43	38	PN40	0.37
DN032 (1 1/4")	76,5	110,3	63,7	16	120	53	89	48	PN40	0.66
DN040 (1 1/2")	89	116,2	63,6	18	120	65	230	54	PN40	0.94
DN050 (2")	103	126	66	19	120	80	265	67	PN40	1.57

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Brass : CW617N UNI EN 12420	Brass : < 1 1/4" CW617N / >1" CW612N	PTFE	PA 6.6

Belven N.V.

Blokhuisstraat 24 | 2800 Mechelen | Belgium  
Tel. 015 29 40 70 | Fax. 015 20 14 13 | [info@belven.com](mailto:info@belven.com) | [www.belven.com](http://www.belven.com)

We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.